

CABLES FOR OUTDOOR INSTALLATIONS

F/UTP Category 5e with a rope

APPLICATION



PBX, V.11, X.21, ISDN, Ethernet (10Base-T), ATM-25/52/155 Mbit/s, 100VG-AnyLAN, Fast Ethernet (100BASE-TX), Token Ring 16/100 Mbit/s, Gigabit Ethernet (1000BASE-T), Firewire 100 Mbit/s

COMPLIANCE WITH THE REQUIREMENTS

ISO/IEC 11801:2002
EN 50173-1:2002
ANSI/TIA/EIA-568-B.2-2001
IEC 61156-5:2002
TU U 31.3-05758730-020-2002

DESIGN

- 1) Conductor: soft copper wire
Diameter: 0.51 mm (24 AWG)
- 2) Insulation: polyethylene
Conductor diameter: 1.07 mm
Pair: two conductors twisted together
Colour identification of pairs:
pair 1: white-blue / blue
pair 2: white-orange / orange
pair 3: white-green / green
pair 4: white-brown / brown
Core: 4 pairs twisted together with a string
- 3) Pair shield: aluminum polymer foil (metal inside).
Copper tinned contact wire \varnothing 0.4 mm is applied longitudinally under the shield.
- 4) Strength member: steel rope
Diameter: 1.5 mm
- 5) Sheath: UV-stabilized polyethylene
Sheath colour: black
Maximum cable dimensions: 7.4x12.9 mm

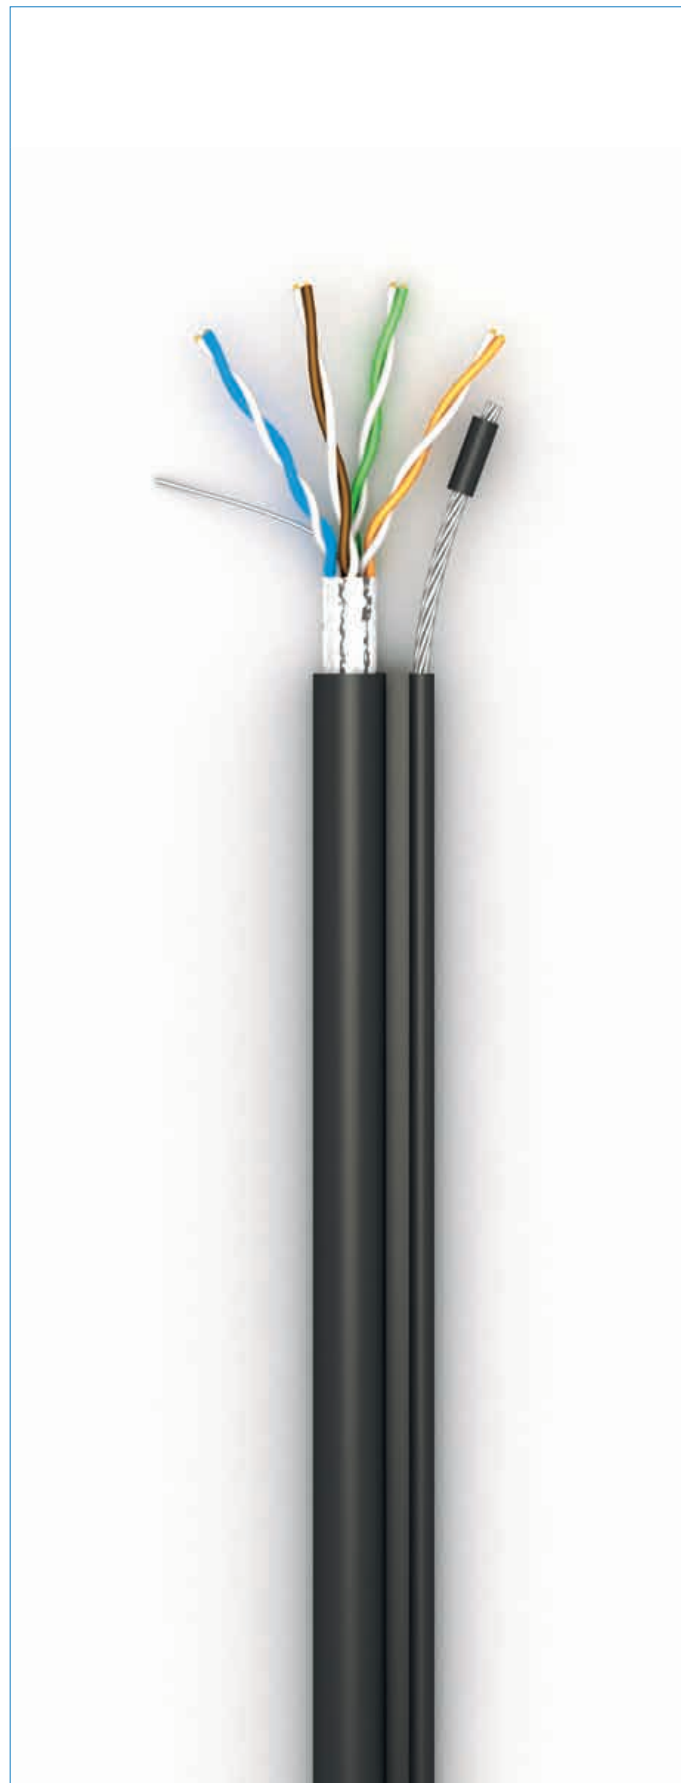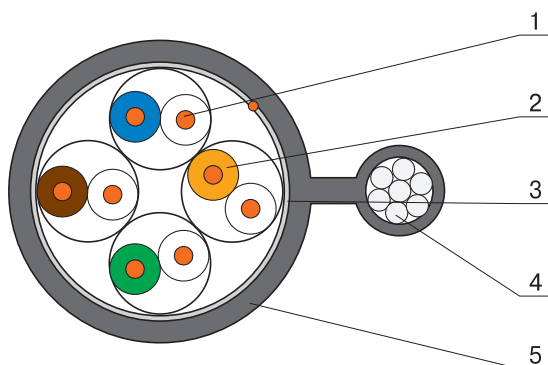

CABLES FOR OUTDOOR INSTALLATIONS

F/UTP Category 5e with a rope

INSTALLATION AND OPERATION CONDITIONS

For suspension on overhead communication lines.
Operation in conditions of heightened electromagnetic impacts on frequencies up to 100 MHz.

ELECTRICAL CHARACTERISTICS AT 20 °C

Direct current resistance	≤ 96 Ohm/km
Insulation resistance	≥ 5 GOhm/km
Capacitance	≤ 56 pF/m
Signal propagation velocity	≥ 0.68 s
Propagation delay	≤ 534+36/√f ns/100 m
Delay shift on the frequency: 100 MHz	≤ 45 ns/100 m
Characteristic impedance in the frequency range of: 1-100 MHz	100±10 Ohm
Screening attenuation on: 30-100 MHz	≤ 40 dB
Test voltage between cores, cores and shield (DC, 2 s)	2.5 kV
Working voltage (DC)	72 V

MECHANICAL CHARACTERISTICS

Temperature range:	
During installation	-15 °C ... +60 °C
After installation	-50 °C ... +60 °C
Bending radius:	
During installation	≥ 10 cable diameters
After installation	≥ 4 cable diameters
Tensile stress	≤ 1,2 kN

MARKING

OK-net <year of production> FTP outdoor CAT.5e 100 MHz
4Pr AWG24 NVP 68% ISO/IEC 11801 100 OHM K-29
<metric mark>

SIGNAL TRANSMISSION PERFORMANCE AT 20 °C

Frequency (MHz)	Attenuation (dB/100 m)		NEXT (dB)		PS-NEXT (dB)		EL-FEXT (dB)		PS-ELFEXT (dB/100 m)		RL (dB)	
	max.*	nom.	min.*	nom.	min.*	nom.	min.*	nom.	min.*	nom.	min.*	nom.
1**	2,1	1,9	65,3	78,0	62,3	75,0	64,0	70,0	61,0	67,0	20,0	25,00
4	4,1	3,8	56,3	76,0	53,3	73,0	52,0	58,0	49,0	55,0	23,0	30,00
10	6,5	6,0	50,3	74,0	47,3	71,0	44,0	52,0	41,0	49,0	25,0	37,00
16	8,3	7,7	47,2	70,0	44,2	67,0	39,9	48,0	36,9	45,0	25,0	34,00
20	9,3	8,6	45,8	69,0	42,8	66,0	38,0	46,0	35,0	43,0	25,0	34,00
31,25	11,7	10,9	42,9	63,0	39,9	60,0	34,1	40,0	31,1	37,0	23,6	33,00
62,50	17,0	15,8	38,4	60,0	35,4	57,0	28,1	36,0	25,1	33,0	21,5	28,00
100	22,0	20,5	35,3	58,0	32,3	55,0	24,0	32,0	21,0	29,0	20,1	24,00

*IEC 61156-5:2002

**Values lower than 4 MHz are given for information only

ORDER INFORMATION

Code	Cable type	Sheath	Packing	Weight, kg/km
49312	КППЭТ-ВП (100) 4x2x0,51 (FTP cat.5e)	PE	Coil 500 m	64.2